


SOLUTION DATA SHEET

Adding Value with a Polymer Solution for Wire and Cable

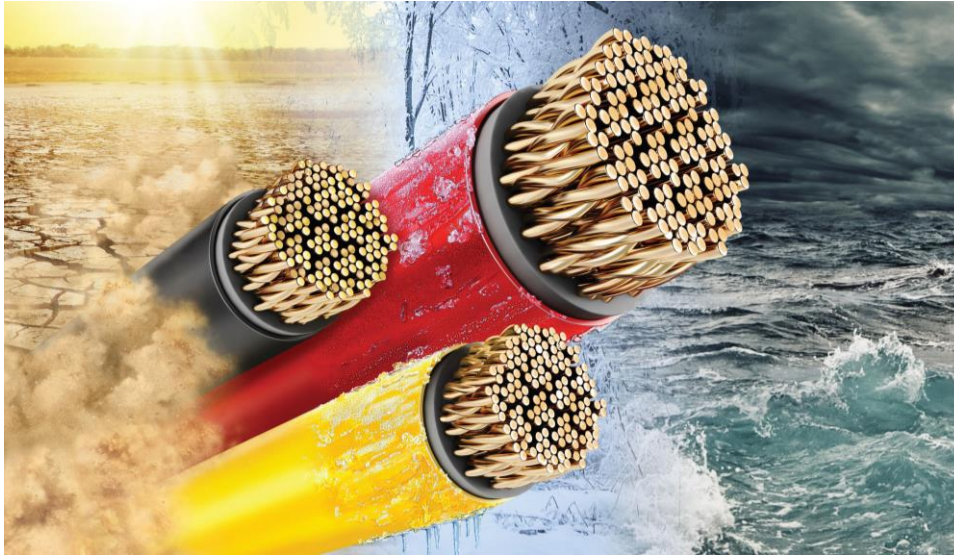

Markets	Robotic and other industrial cables; Data, energy, and communication cables; Construction, electric vehicle (EV) charging and transportation cables; Mining and marine cables
Polymer	ESTANE® thermoplastic polyurethane (TPU)
Key Benefits	<ul style="list-style-type: none"> • Non-Halogenated Flame Retardancy (NHFR) • Sustainable alternative • Very good abrasion resistance • Flexibility and toughness

Lubrizol has an extensive portfolio of thermoplastic polyurethane (TPU) solutions commercialized as ESTANE® ZHF TPU which are widely used in wire and cable. These solutions make it easy to produce cable jacketing with an optimum design without sacrificing performance or regulatory compliance, while being halogen-free. The Lubrizol Engineered Polymers team of applications & material specialists and expert technicians have pooled efforts to develop a sustainable portfolio that can withstand the harsh

The Lubrizol Corporation ("Lubrizol") hopes that you have found the information provided helpful, but you are cautioned that this material, including any prototype formulas, is for informational purposes only and you are solely responsible for making your own assessment of appropriate use of the information. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAWS, LUBRIZOL MAKES NO REPRESENTATIONS, GUARANTEES, OR WARRANTIES (WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE), INCLUDING ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, OR REGARDING THE COMPLETENESS, ACCURACY, OR TIMELINESS OF ANY INFORMATION. Lubrizol does not guarantee how the materials referenced herein will perform in combination with other substances, in any methods, conditions, or processes, with any equipment, or in non-laboratory environments. BEFORE COMMERCIALIZATION OF ANY PRODUCT CONTAINING THESE MATERIALS, YOU SHOULD THOROUGHLY TEST SUCH PRODUCT, INCLUDING HOW THE PRODUCT IS PACKAGED, TO DETERMINE ITS PERFORMANCE, EFFICACY, AND SAFETY. You are solely responsible for the performance, efficacy, and safety of any products you manufacture. Lubrizol shall not be liable, and you shall assume all risk and responsibility for, any use or handling of any material. Any claims may not be approved in all jurisdictions. Any entity making claims related to these products is responsible for complying with local laws and regulations. Nothing contained herein is to be considered as permission, recommendation, or inducement to practice any patented invention without permission of the patent owner, and it is your sole responsibility to determine if any issues related to patent infringement of any component or combination of components relating to the information provided exists. You acknowledge and agree that you are using the information provided herein at your own risk. If you are dissatisfied with the information provided by Lubrizol, your exclusive remedy shall be to not use the information.

© 2023 The Lubrizol Corporation.
All rights reserved. All marks are the property of The Lubrizol Corporation.

go.lubrizol.com/EP

conditions cables are subject to, and still meet current market needs and compliance requirements of UL and EN 50363-10-2 industry norms.

One of the latest additions, **ESTANE ZHF 90AT8 technology**, has proven to be very versatile when applied in flame retardant (FR) wire and cable applications, being the most popular choice among our solutions of non-halogenated materials for cable sheathing. This has resulted in the offering of different versions of the same winning formula.

This FR technology has very good tear resistance and excellent abrasion while withstanding the most extreme temperatures. Given its nature to perform well in different environments, Lubrizol has focused on using this technology to expand the series and extend the durability and service life of valuable cable systems, catering for thick and thin cables.

Some of the key benefits of polyether based **ESTANE ZHF 90AT8** TPUs are listed below:

- High tensile strength
- Excellent mechanical properties and good abrasion resistance
- Good bacterial, oil and hydrolysis resistance
- Very good heat resistance (UL 105°C)

Product	Hardness (Shore A)	Main Applications	Key features
ESTANE® ZHF 90AT8L NAT 01	89	Automation, sensor, drag chain and robotic cables	Consistent EN 50363-10-2 capable, non halogenated flame retardant
ESTANE® ZHF 90AT8H NAT 02	89	Automation, sensor, drag chain and robotic cables	V0 UL 94 certified and temperature rating of 105°C. Easy to extrude. Low MI EN 50363-10-2 capable >25 MPa
ESTANE® ZHF 90AT8H NAT 03	89	Automation, sensor, drag chain and robotic cables	V0 UL 94 and temperature rating of 105°C. Easy to extrude. Low MI EN 50363-10-2 capable >25 MPa. Reduced tackiness for high-speed extrusion (200 m/min +)

Table 1: Overview of new halogen-free, flame-retardant grades for wire and cable

Lubrizol’s ESTANE ZHF TPU portfolio has been developed considering the latest trends for safer and regulatory-compliant materials while keeping up high standards of performance. Lubrizol engineered polymers exhibit superior abrasion and wear resistance for extended part service life compared to other elastomers and rigid plastics.

For more information, please visit our web site: www.lubrizol.com/Engineered-Polymers

The Lubrizol Corporation (“Lubrizol”) hopes that you have found the information provided helpful, but you are cautioned that this material, including any prototype formulas, is for informational purposes only and you are solely responsible for making your own assessment of appropriate use of the information. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAWS, LUBRIZOL MAKES NO REPRESENTATIONS, GUARANTEES, OR WARRANTIES (WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE), INCLUDING ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, OR REGARDING THE COMPLETENESS, ACCURACY, OR TIMELINESS OF ANY INFORMATION. Lubrizol does not guarantee how the materials referenced herein will perform in combination with other substances, in any methods, conditions, or processes, with any equipment, or in non-laboratory environments. BEFORE COMMERCIALIZATION OF ANY PRODUCT CONTAINING THESE MATERIALS, YOU SHOULD THOROUGHLY TEST SUCH PRODUCT, INCLUDING HOW THE PRODUCT IS PACKAGED, TO DETERMINE ITS PERFORMANCE, EFFICACY, AND SAFETY. You are solely responsible for the performance, efficacy, and safety of any products you manufacture. Lubrizol shall not be liable, and you shall assume all risk and responsibility for, any use or handling of any material. Any claims may not be approved in all jurisdictions. Any entity making claims related to these products is responsible for complying with local laws and regulations. Nothing contained herein is to be considered as permission, recommendation, or inducement to practice any patented invention without permission of the patent owner, and it is your sole responsibility to determine if any issues related to patent infringement of any component or combination of components relating to the information provided exists. You acknowledge and agree that you are using the information provided herein at your own risk. If you are dissatisfied with the information provided by Lubrizol, your exclusive remedy shall be to not use the information.