

APPLICATION DATA SHEET

Lanco™ LiquiMatt 6237

Matting Agent for Wood Coatings

GENERAL APPLICATION

Lanco LiquiMatt 6237 is an easy to handle wax dispersion used to efficiently control gloss in solvent-based coatings. Lanco LiquiMatt 6237 does not need high shear for incorporation.

BENEFITS

- Wide compatibility
- Good uniform matting
- Easy to incorporate
- Dust free handling
- High active content
- Improved mar resistance

METHOD OF USE



LANCO LIQUIMATT 6237 can be easily incorporated at the let-down stage, or post-added using low speed mixers.

DOSAGE

Testing has confirmed a dosage of 1% to 1.5% of Lanco LiquiMatt 6237 based on total formulation weight is effective. Minor adjustments may be required depending on the level of matting desired in a specific coating.

PERFORMANCE RESULTS

Testing in a commercially available 450 g/l solvent-borne floor finish through post addition to the final formulation. The result was excellent matting with minimal viscosity increase in the formulation.

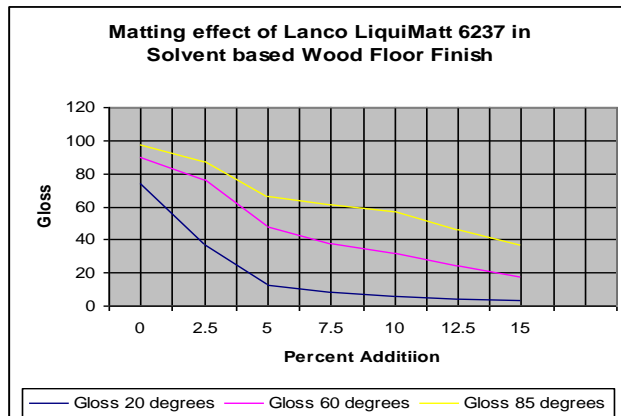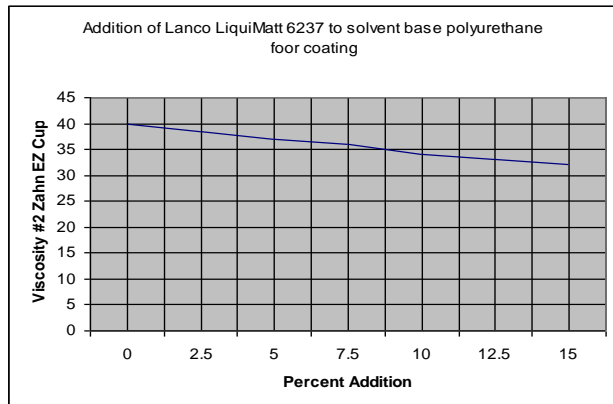



For further information, please contact:

Global Headquarters
Lubrizol Advanced Materials, Inc.
9911 Brecksville Road
Cleveland, OH 44141-3201
Tel: 216-447-5000

41 Science Park Road
04-11 The Gemini
Singapore Science Park II
Singapore 117610
Tel.: +65 6773 1180

Hexagon Tower
Blackley
Manchester M9 8ZS
England
Tel.: +44 (0) 161 721 2004

E-mail:
coatings@lubrizol.com

The information contained herein is believed to be reliable, but no representations, guarantees or warranties of any kind are made as to its accuracy, suitability for particular applications or the results to be obtained. The information is based on laboratory work with small-scale equipment and does not necessarily indicate end product performance. Because of the variations in methods, conditions and equipment used commercially in processing these materials, no warranties or guarantees are made as to the suitability of the products for the applications disclosed. Full-scale testing and end product performance are the responsibility of the user. Lubrizol Advanced Materials, Inc. shall not be liable for and the customer assumes all risk and liability of any use or handling of any material beyond Lubrizol Advanced Materials, Inc.'s direct control. The SELLER MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Nothing contained herein is to be considered as permission, recommendation, nor as an inducement to practice any patented invention without permission of the patent owner.

© The Lubrizol Corporation 2009, all rights reserved.