



# Solsperse<sup>™</sup>Hyperdispersants

# ADVANCED DISPERSION SOLUTIONS FOR PIGMENTS AND FILLERS

Solsperse™ Hyperdispersants empower formulators to develop extremely efficient particle dispersion and particle size stability for high to mid-range solvent-based, water-based, energy curable, thermoset or thermoplastic systems. Products provide the highest level of appearance and performance, manufacturing efficiencies and quality, as well as the ability to effectively work with difficult to disperse pigments and resin-less systems.

### **BENEFITS**

- Highest color value at the lowest possible pigment concentration
- Efficient color development
- · High pigment/filler loadings
- Improved manufacturing productivity
- Formulation flexibility
- Enhanced mechanical properties, stability, flow and uniformity
- Reduced VOC levels

### **BRINGING COLOR TO LIFE**

Lubrizol dispersants are essential ingredients for formulating high quality, high solids, low viscosity dispersions of organic and inorganic pigments, carbon black, mineral extenders and many other particles. They help formulators achieve the highest color value with high pigment/filler loadings and efficient color development. When using Solsperse, formulations will have vivid color strength with strong, bright colors and the requisite transparency or opacity.

## DELIVERING MANUFACTURING EFFICIENCIES

Incorporating Solsperse Hyperdispersants into the millbase reduces the viscosity and increases the pigment content for improved manufacturing productivity. Solsperse also decreases dispersion time and maximizes pigment loadings in the grind stage to lower energy and labor costs, producing more final product from a given weight of millbase. Additionally, because Lubrizol dispersants permit increased pigment loadings in the millbase, there is a reduction in potentially carrying incompatible medium through from the millbase to the final formulation.

### AN OUTSTANDING CHOICE

Solsperse Hyperdispersants enable formulators to be more flexible and deliver superior performance and quality. Solsperse enhances mechanical properties, stability, flow and uniformity. Broad compatibility across a range of media makes it possible to stock fewer products in larger quantities resulting in less inventory and lower maintenance costs. Solsperse products meet most environmental standards and decrease VOCs in high solids coatings. For optimum flexibility and performance, choose Solsperse first.











Gloss Retention

## Solsperse™ Hyperdispersants Selector

# Lubrizol Locations

### **NORTH AMERICA**

Lubrizol Advanced Materials, Inc. 9911 Brecksville Road Brecksville, OH 44141 USA

+1.888.234.2436

#### **FUROPE**

Lubrizol Limited PO Box 42 Hexagon Tower, Blackley Manchester M9 8GQ United Kingdom +49.421.69333


#### **ASIA-PACIFIC**

**Lubrizol Specialty** Chemicals (Shanghai) Co., Ltd 10/F, Park Center International No. 1088 Fang Dian Road Shanghai 201204, PR China +8621.3866.0366

### **SOUTH AMERICA**

Lubrizol do Brasil Aditivos Ltda Avenida Nove de Julho, 3653 Jardim Paulista Sao Paulo - SP 01407-000

+55.11.4097.0250

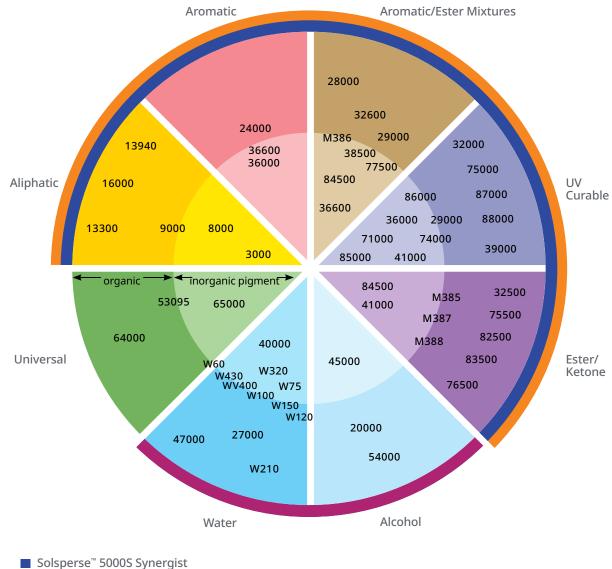

- Solsperse<sup>™</sup> 12000S Synergist
- Solsperse<sup>™</sup> 22000 Synergist

Lubrizol Advanced Materials, Inc. ("Lubrizol") hopes that you have found the information provided helpful, but you are cautioned that this material, including any prototype formulas, is for informational purposes only and you are solely responsible for making your own assessment of appropriate use of the information. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAWS, LUBRIZOL MAKES NO REPRESENTATIONS, GUARANTEES, OR WARRANTIES (WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE), INCLUDING ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, OR REGARDING THE COMPLETENESS, ACCURACY, OR TIMELINESS OF ANY INFORMATION. Lubrizol does not guarantee how the materials referenced herein will perform in A PARTICULAR PORPOSE, OR REGARDING THE COMPLETENESS, ACCORACT, OR TIMELINESS OF ANY INFORMATION. Eudificities for substances, in any methods, conditions, or processes, with any equipment, or in non-laboratory environments. BEFORE COMMERCIALIZATION OF ANY PRODUCT CONTAINING THESE MATERIALS, YOU SHOULD THOROUGHLY TEST SUCH PRODUCT, INCLUDING HOW THE PRODUCT FOR EXAMPLE, TO DETERMINE ITS PERFORMANCE, EFFICACY, AND SAFETY. You are solely responsible for the performance, efficacy, and safety of any products you manufacture. Lubrizol shall not be liable, and you shall assume all risk and responsibility for, any use or handling of any material. Any claims may not be approved in all jurisdictions. Any entity making claims related to these products is responsible for complying with local laws and regulations. Nothing contained herein is to be considered as permission, recommendation, or inducement to practice any patented invention without permission of the patent owner, and it is your sole responsibility to determine if any issues related to patent infringement of any component or combination of components relating to the information provided exists. You acknowledge and agree that you are using the information provided herein at your own risk. If you are dissatisfied with the information provided by Lubrizol, your exclusive remedy shall be to not use the information

Trademarks owned by The Lubrizol Corporation or its affiliates. ©The Lubrizol Corporation 2025, All Rights Reserved. 25-0004491

